



FEATURES

- Can be Integrated with Loading Tower and Carousel to provide a Fully Synchronised, Failsafe, Lay Spread
- Product Specific Track Pads available – Track Profile and Material Compound
- Suitable for wide range of Product ODs

10Te VERTICAL TENSIONER


SH-HTE-10

EQUIPMENT SPECIFICATIONS SHEET


- 10TE LINE PULL
- MANUAL HAUL IN/OUT AND CONSTANT TENSION OPERATION MODES
- 50MM - 500MM PRODUCT OD RANGE
(DEPENDENT ON PAD TYPE)
- 800M/HR LAY SPEED




PLAN VIEW

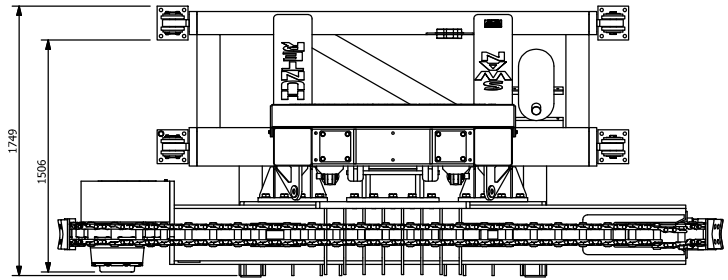

SIDE VIEW

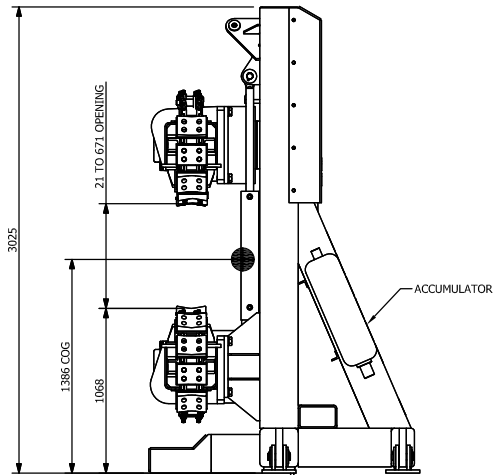

FRONT VIEW

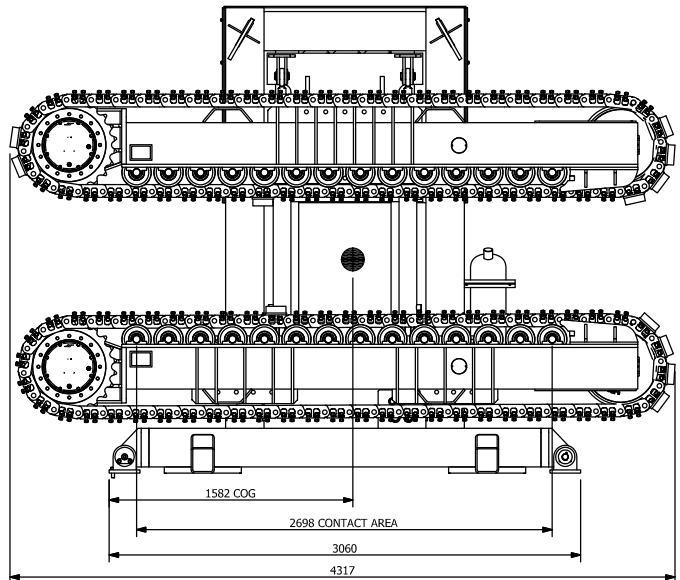

→ TECHNICAL DETAILS

Dimensions

4.3m L x 1.8m B x 3.1m H

Assembled Weight [With Base Frame]

8.5Te

Track Contact Length

2.7m

→ CAPABILITY

Max Line Pull

10Te

Drive

2 X Rexroth Bent Axis Hydraulic Motors
Equipped with Failsafe Brakes

Max Squeeze Force / Track

50Te

→ POWER

HPU

Dual 54 kW – 1.77m L x 1.36m B x 1.86m H – 4.5Te

Required Supply

440V, 60Hz/50Hz, 3 Phase

→ CONTROLS

Local and Remote / Control Cabin if Required -
can also be linked to Complete Lay Spread Control System

→ LIFTING EQUIPMENT

Certified Lifting Rigging Sets Supplied for Tensioner,
HPU, and Control Cabin if Required

→ CONNECTION PACKAGE

Hydraulic Hose & Power Cable Set Supplied

www.swanhunter.com

+44 (0) 191 295 0295

info@swanhunter.com