

FEATURES

- Modular Reel Carousel Design to suit Oil & Gas and Offshore Wind Flexible/Umbilical/Cable Lay Markets.
- Mobilised with two lifts – 1st lift of circular base grillage, turntable, and core, and 2nd lift of top flange.
- Low Profile Circular Grillage optimises vessel deck space enhancing its suitability for smaller offshore wind installation vessels.
- Hydraulic Drives / Controls can be integrated to spooling tensioner and deck tensioner to provide a fully synchronised, failsafe, lay spread.
- Can be offered as carousel only, or with dedicated spooling tower, and deck tensioner.


- 2000TE PRODUCT CAPACITY
- 15M OUTER DIAMETER
- 4.5M – 8M VARIABLE INNER CORE DIAMETER
- 6M CORE HEIGHT (ADJUSTABLE)
- PARTITIONS AND HEAD LANDING AREAS AVAILABLE

2000Te REEL CAROUSEL SH-RC-2000

EQUIPMENT SPECIFICATIONS SHEET



ELEVATION OF CAROUSEL

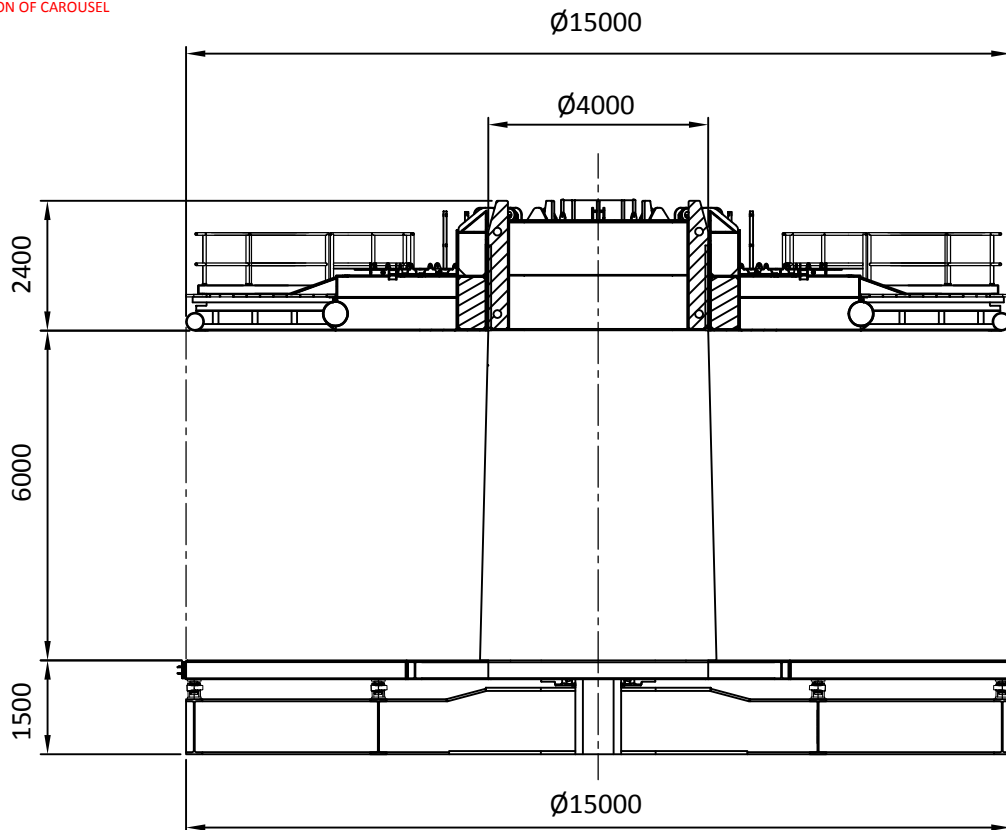

*Carousel Dimensions can be adjusted to suit specific project requirements

→ TECHNICAL DETAILS

Dimensions
15m OD x 9.9m H
Assembled Weight [Empty]
15m - 344Te

→ CAPABILITY

Drive
2 x 140 kW Hydraulic Motors
Equipped with Failsafe Brakes
Speed
1000m/hr maximum lay rate

→ POWER

HPU
280 kW - Standalone 6m x 2.44m x 2.59m
(20ft) Container
Required Supply
440V/400V, 60Hz/50Hz, 3 Phase

→ OPTIONAL ANCILLARY EQUIPMENT

Loading Tower c/w 5Te / 10Te Spooling Tensioner
Deck Tensioner
(See Individual Specification Sheets for info).

→ CONTROLS

Central Control Cabin Integrated with Loading Tower / Standalone if
Required – can also be linked to Complete Lay Spread Control System.

→ LIFTING EQUIPMENT

1 x Certified Lifting Rigging Set Supplied

→ CONNECTION PACKAGE

1 x Hydraulic Hose & Power Cable Set Supplied

→ DESIGN VERIFICATION

Lloyds Register 2009 (CLAME)

www.swanhunter.com

+44 (0) 191 295 0295

info@swanhunter.com